



AF24-1800-5 RPM 960 20 °C

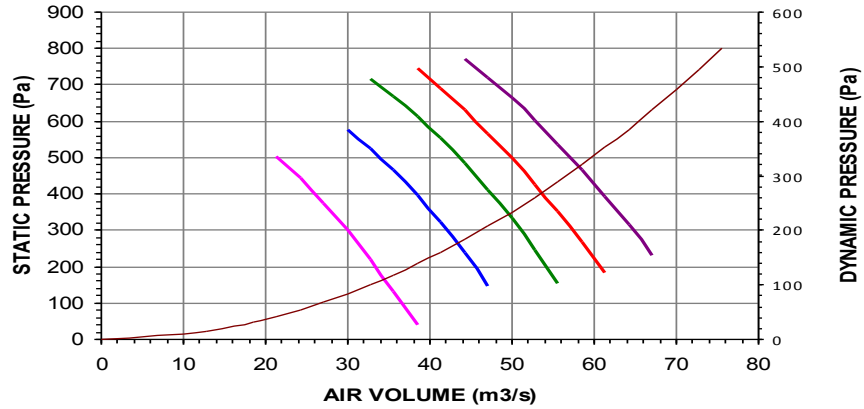


— 10° — 15° — 20° — 25° — 30° — pdin




AF24-1800-5 RPM 960 20 °C

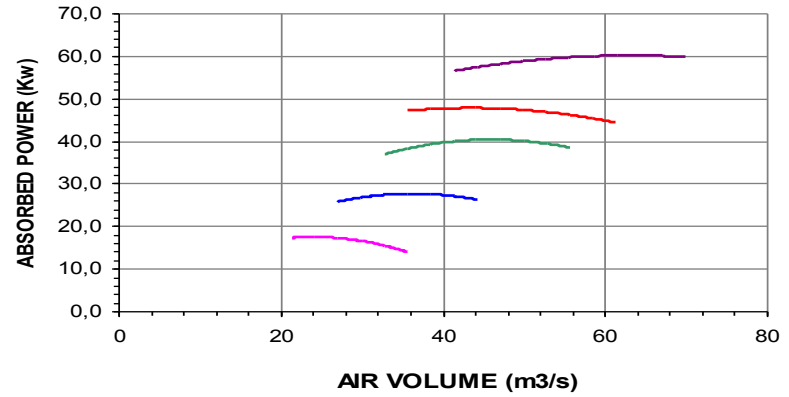




AF24-1800-5 RPM 960 20 °C

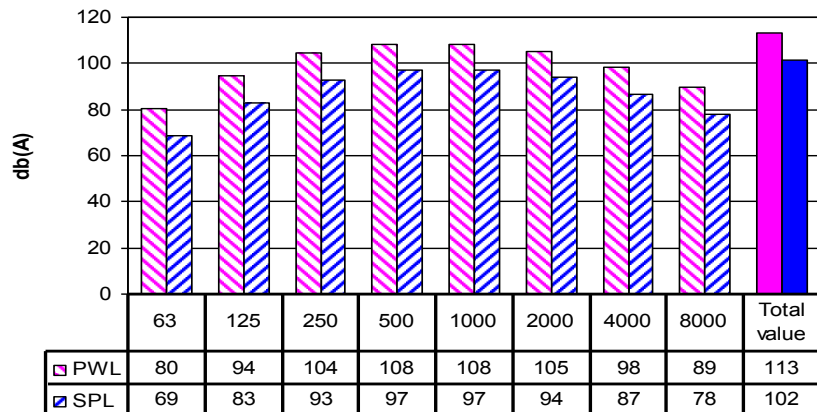




Noise spectrum referring to max efficiency of 20° curve
Variation of +/- 3 db(A) on total range of performance

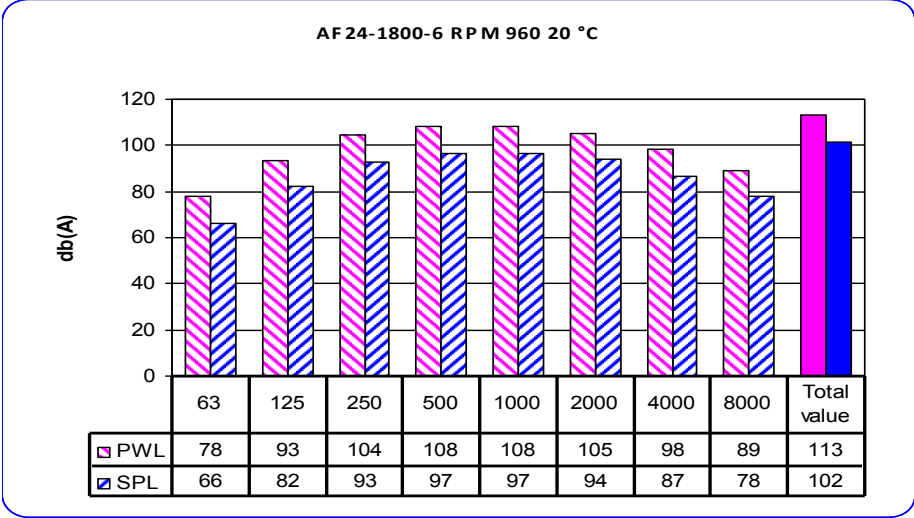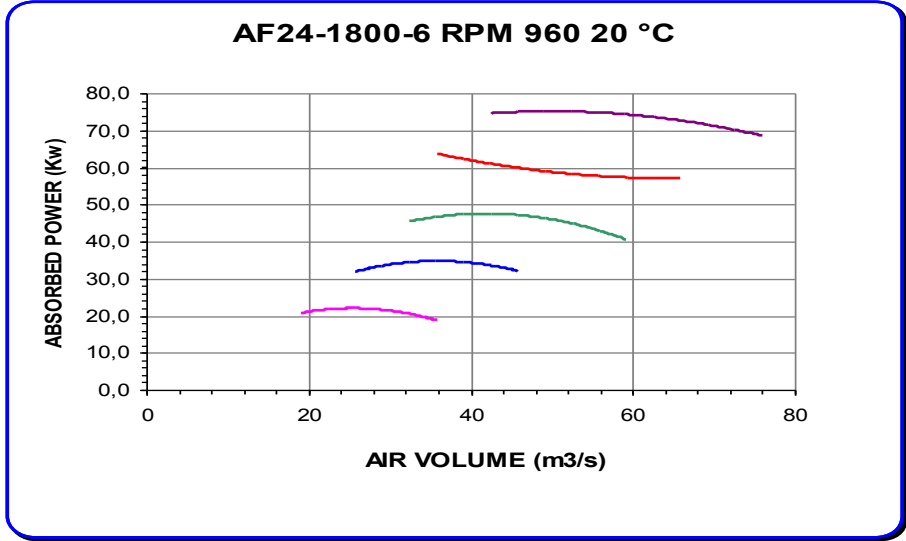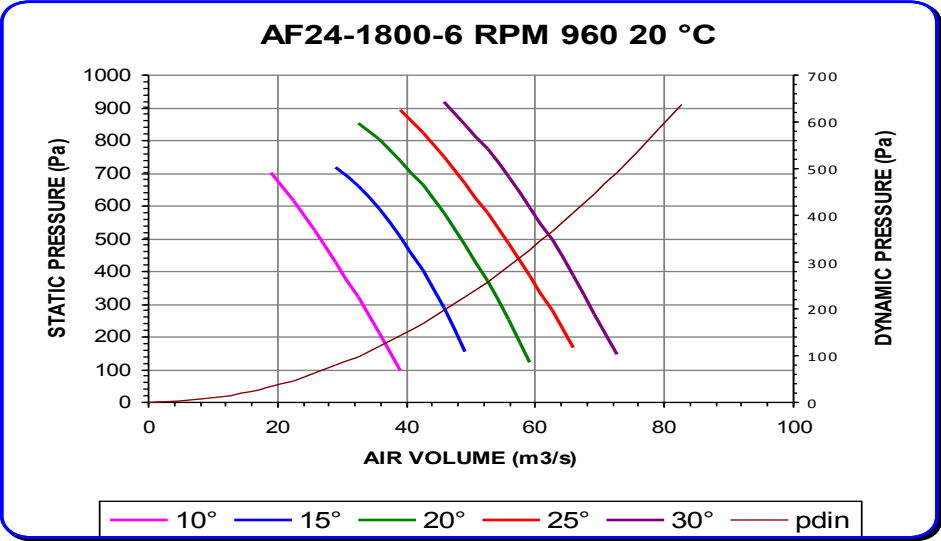




Noise spectrum referring to max efficiency of 20° curve
 Variation of +/- 3 db(A) on total range of performance

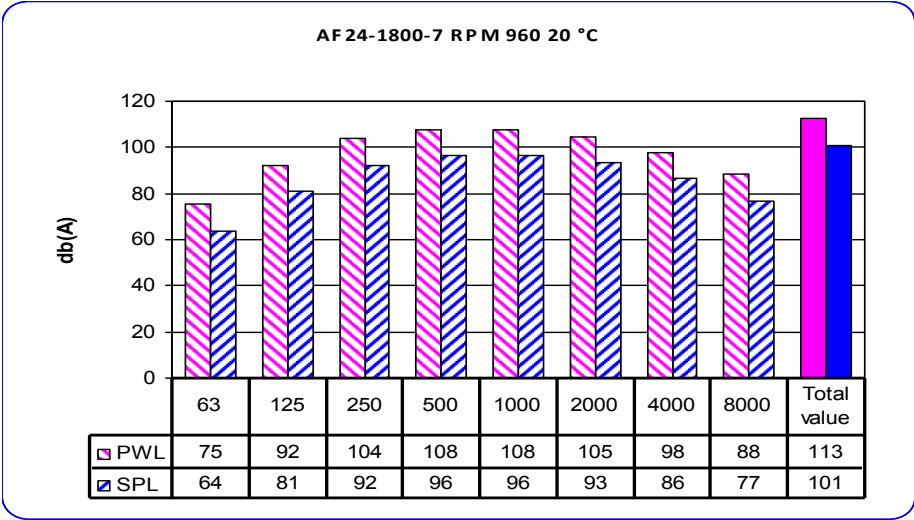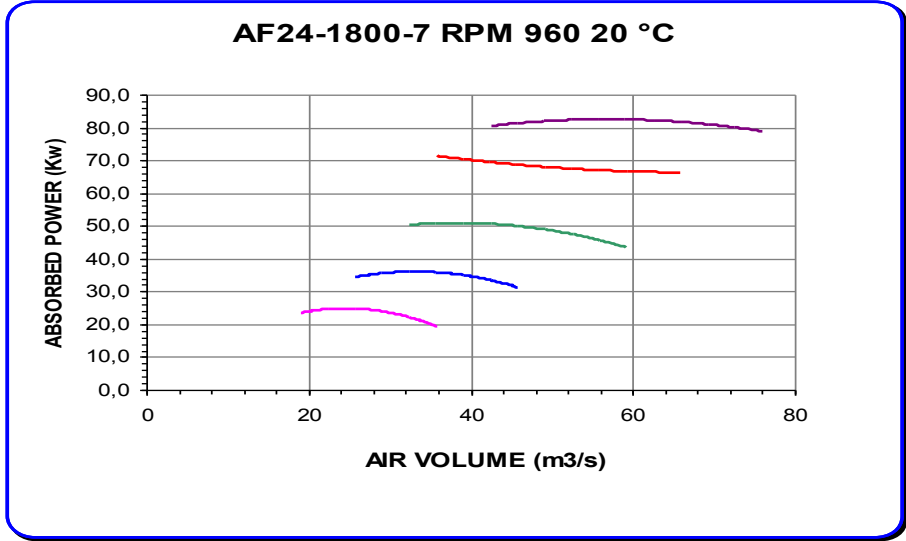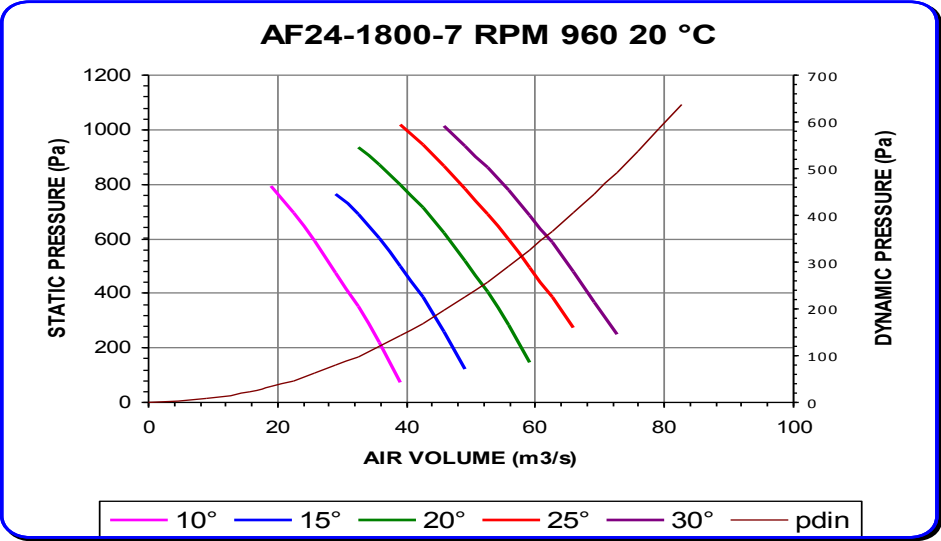




Noise spectrum referring to max efficiency of 20° curve
 Variation of +/- 3 db(A) on total range of performance

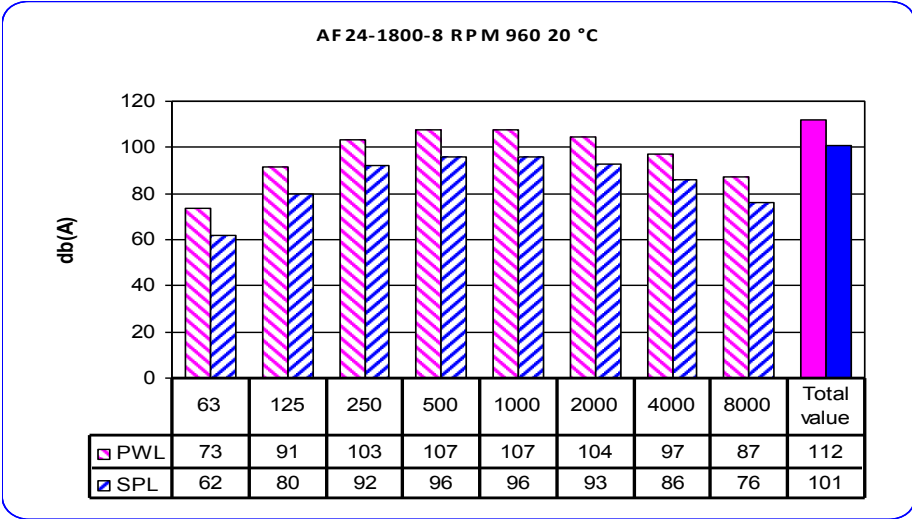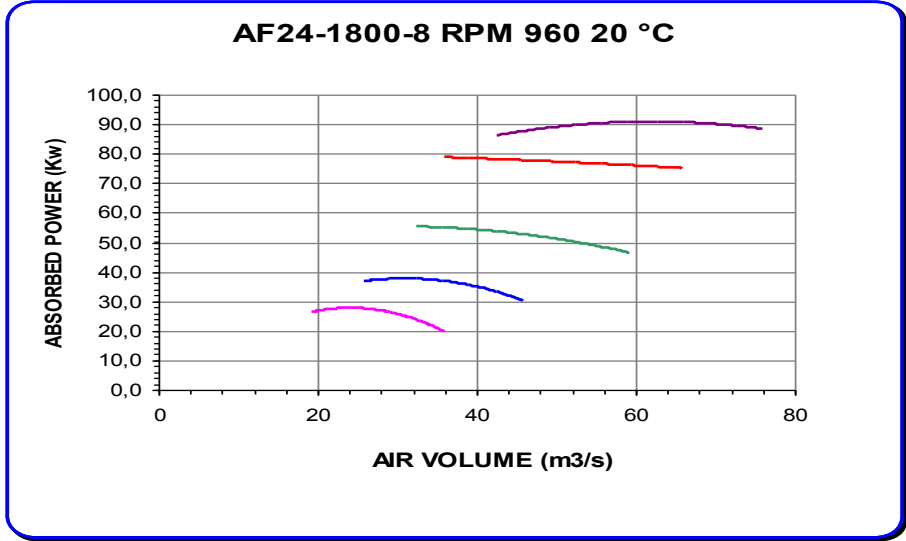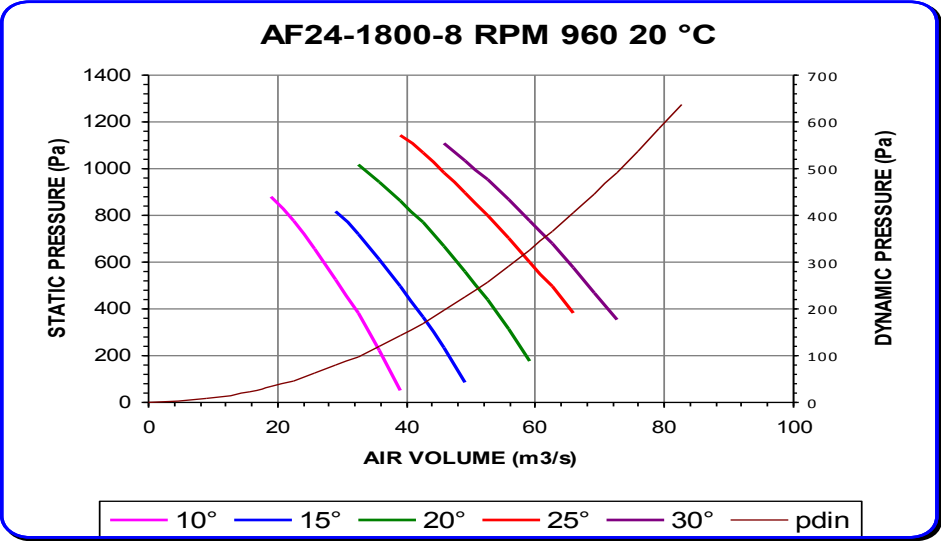




Noise spectrum referring to max efficiency of 20° curve
 Variation of +/- 3 db(A) on total range of performance

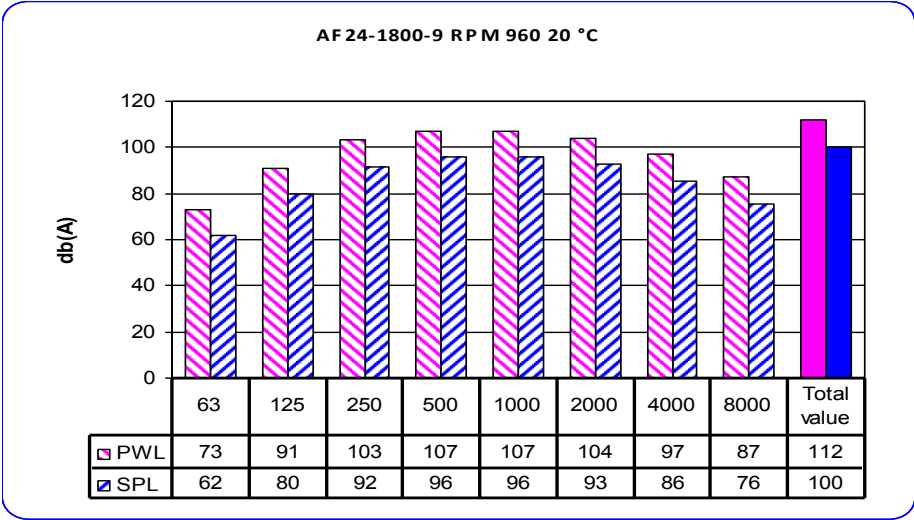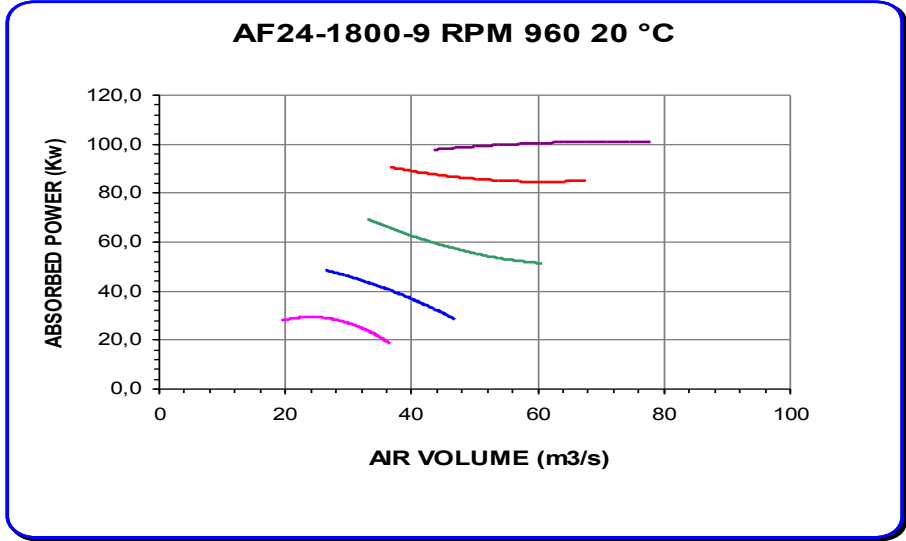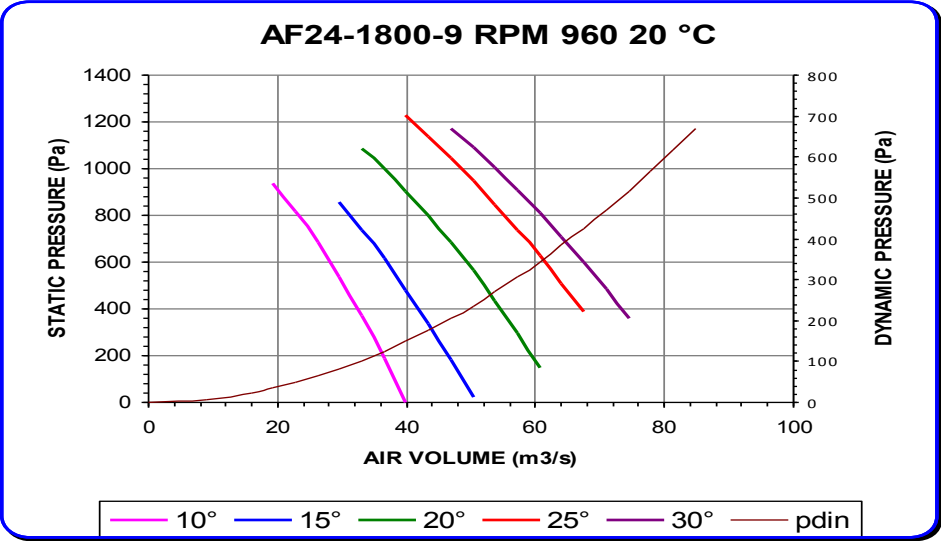

Noise spectrum referring to max efficiency of 20° curve
 Variation of +/- 3 db(A) on total range of performance

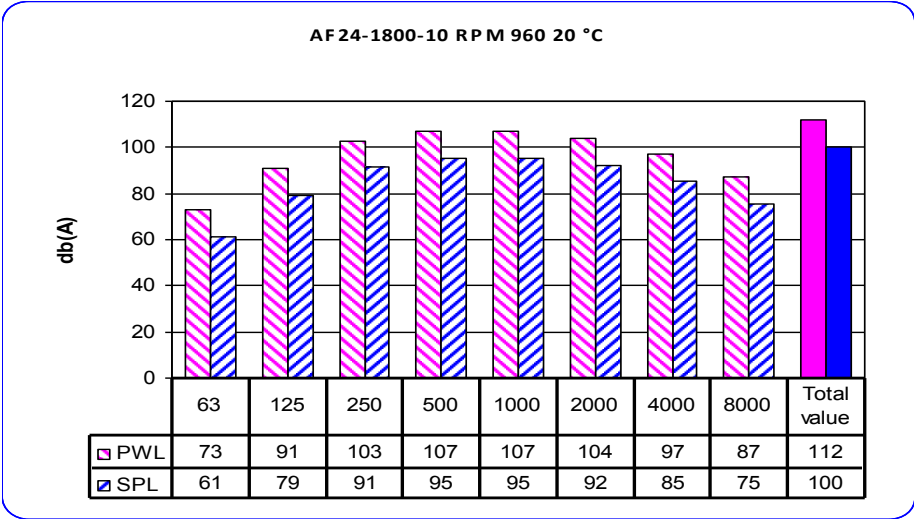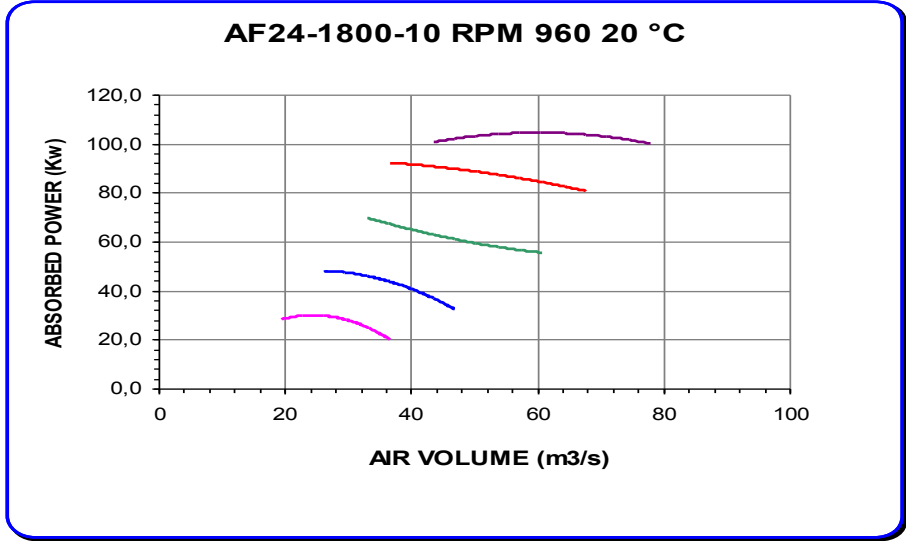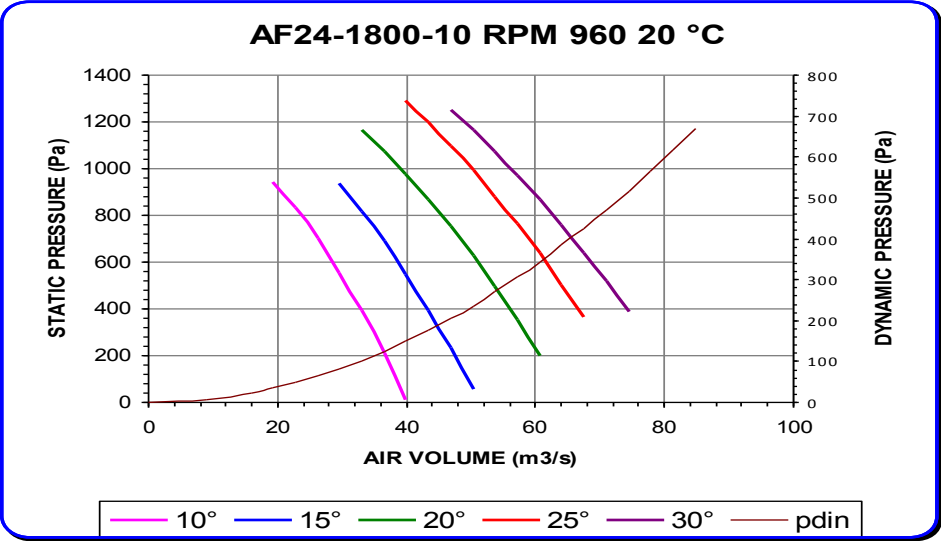

Noise spectrum referring to max efficiency of 20° curve
 Variation of +/- 3 db(A) on total range of performance

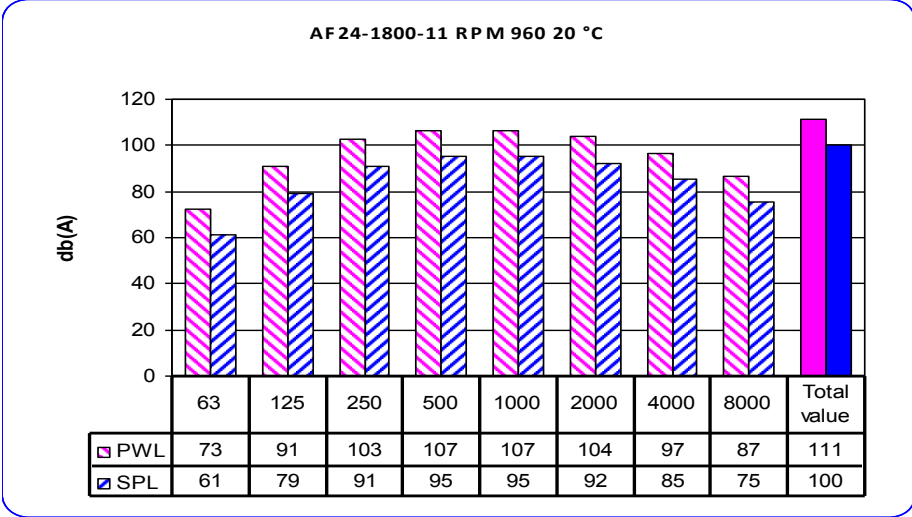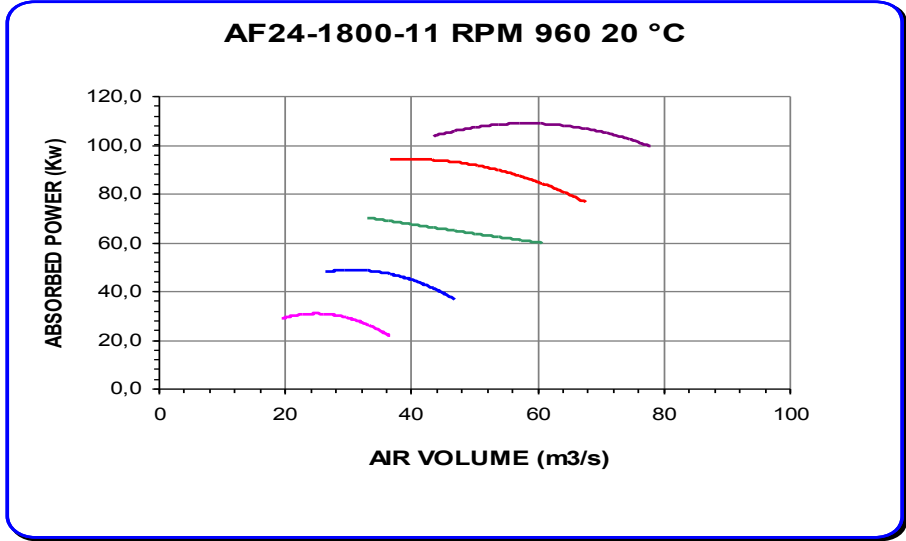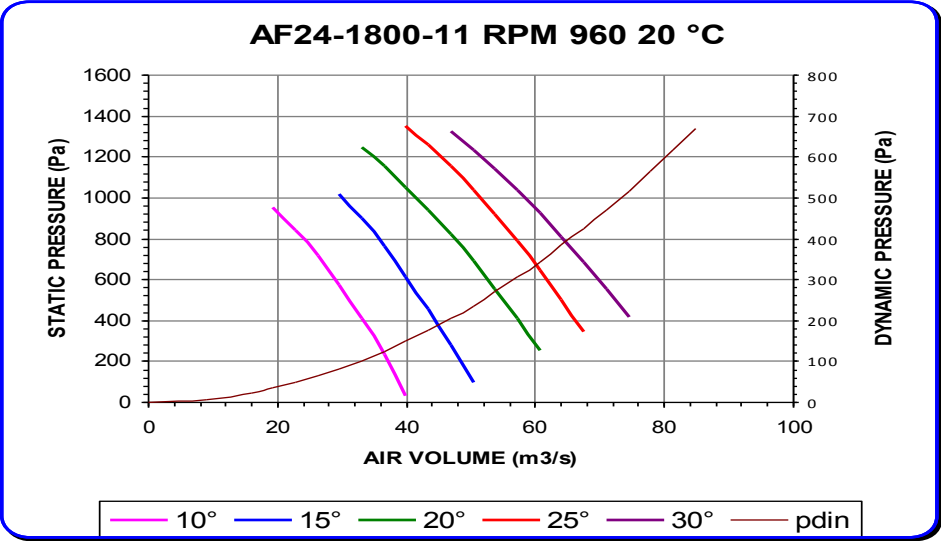

Noise spectrum referring to max efficiency of 20° curve
 Variation of +/- 3 db(A) on total range of performance